

## LED Semi-Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


### Description:

One-light LED semi-flush mount features a modern square pattern in a Brushed Nickel metal shade that surrounds a summer linen fabric shade with a glass diffuser. 3000K, 90+ CRI 1,211 lumens 71.2 lumens/watt per module (source).

### Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- Metal steel shade, Fabric fabric shade, Etchedglass diffuser
- LED Module is replaceable (part # 93053641)
- Concentric circular pattern in an Brushed Nickel metal shade.
- Contemporary styling.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

### Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	825.93/51.3 (LM-79)
CCT	3000 K
CRI	90+ CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

## P2332-0930K9

### Images:



### Dimensions:

Diameter: 14"  
Height: 10-1/2"

Glass  
Width: 14"  
Height: 5"  
Glass 2  
Width: 12"  
Height: 4-3/16"  
Glass 3  
Width: 11.4375"  
Height: 0.125"

## Photometrics:

## P2332-0930K9

<b>ELECTRICAL DATA</b>	<b>P2332-0930K9</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

\*See Dimming Notes for more information

### P2332-0930K9


LED Light Engine: 3000 K 90+ CRI  
 System Wattage: 17  
 Fixture delivered lumens: 825.93  
 Fixture Efficacy: 51.3  
 Spacing Criteria: 1.3

### CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	244	
5	243	23
15	240	68
25	226	104
35	191	119
45	144	110
55	98	87
65	61	61
75	35	37
85	14	17
90	11	
95	12	14
105	27	28
115	37	36
125	41	37
135	44	34
145	42	27
155	34	16
165	23	7
175	11	1
180	8	

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	195	23.6
0-40	314	38.0
0-60	512	61.9
0-90	626	75.8
90-120	78	9.5
90-130	115	13.9
90-150	175	21.2
90-180	200	24.2
0-180	826	100.0

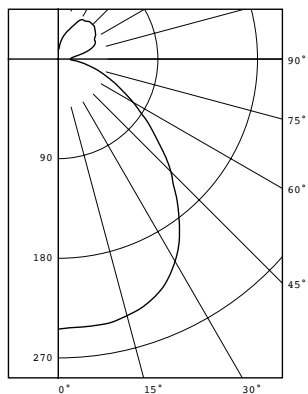

Test 16.00780 Test Date 04/06/16

## P2332-0930K9

### Dimming Notes:

---

P2332 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron Nova T NTELV-300

Lutron Verti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.